

75CTRW3.5 Straight Angle Rectangular Waveguide to Coaxial Adapter 10 – 15 GHz WR75 to 3.5mm Female

Attributes

Electrical Specification

Adapter Type	Right Angel
Adapter Grade	Standard
Frequency Band	Ku
Waveguide Type	Rectangular
Waveguide Size EI WR	WR75
Min. Frequency (GHz)	10
Max. Frequency (GHz)	15
VSWR Max	1.18
VSWR Min	1.0025
Impedance (Ω)	50
Max. Insertion Loss (dB)	0.25
Min. Insertion Loss (dB)	0.22

Interface

Flange Style	Square
Connector	3.5 mm
Connector Type	Female

Mechanical Specification



Body Material	Al
Finishing	Gray Paint
Operating Temp Low($^{\circ}$ c)	-50
Operating Temp High($^{\circ}$ c)	80






Overview

Right angle rectangular waveguide to coaxial adapter 75CTRW3.5, operating from 10 to 15 GHz with a 0.25dB insertion loss and low VSWR 1.25. 75CTRW3.5 can be an efficient transition between the rectangular waveguide WR75 and coaxial 3.5 female connector. It can handle 50W continuously and 3KW peak power. The flange of waveguide WR75 is APF75A. These waveguide to coaxial adapters is consistent with the CACIRA standard of high quality and are indispensable components in any microwave project, such as microwave testing, and systems.

Results (Back to Back Connection)

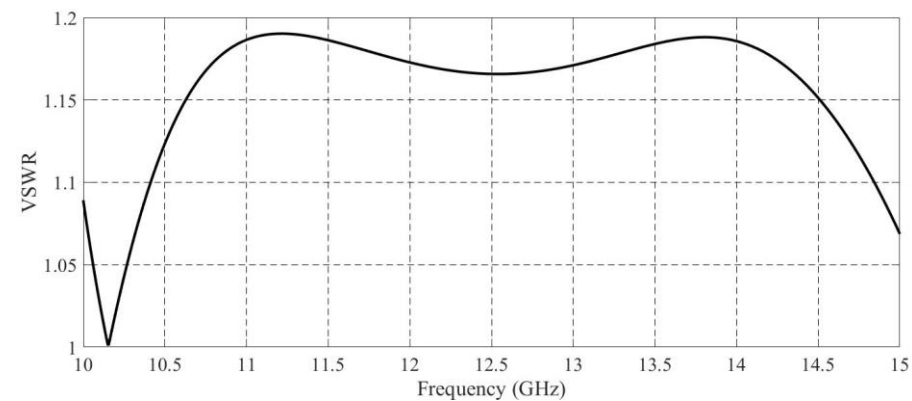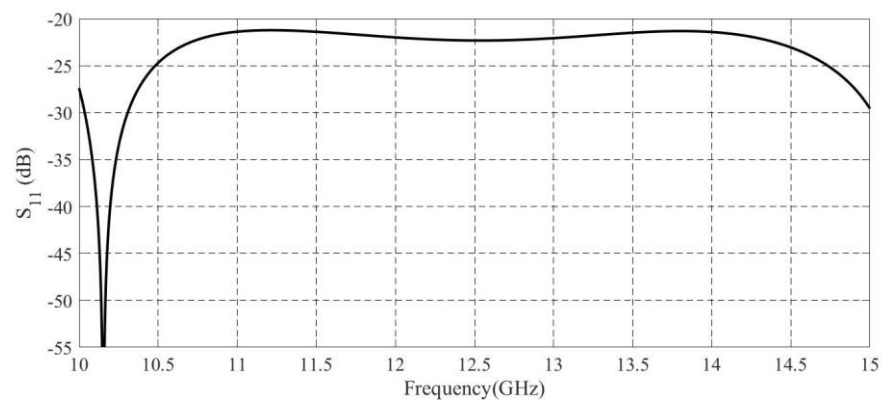

Drawing

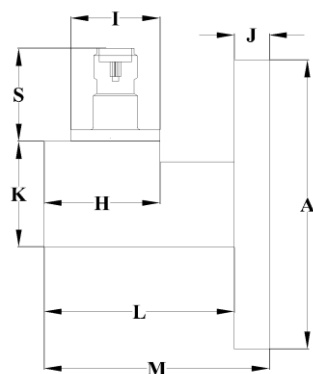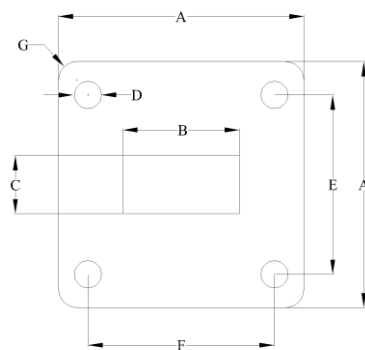

Parameter	Inch (mm)	Parameter	Inch (mm)
A	1.311 (33.3)	O	0.517(13.143)
B	0.75(19.05)	P	0.5 (12.7)
C	0.375(9.525)	Q	0.5 (12.7)
D	0.144(3.66)		
E	0.995 (25.28)		
F	0.994 (25.25)		
G	0.059(1.5)		
H	0.517(13.143)		
I	0.5 (12.7)		
J	0.197(5)		
K	0.588(14.925)		
L	0.827 (21)		
M	1.024(26)		
N	0.829 (21.05)		